




## ADEQUATE PROTECTIVE OVERHANG

Per AutumnWOOD Door's Limited One Year Warranty – an “Adequate Protective Overhang” is defined as an overhang projecting a distance from the structure equal to at least one half the elevation distance between the bottom of the door and the base of the overhang structure at the point that is the farthest from the door.

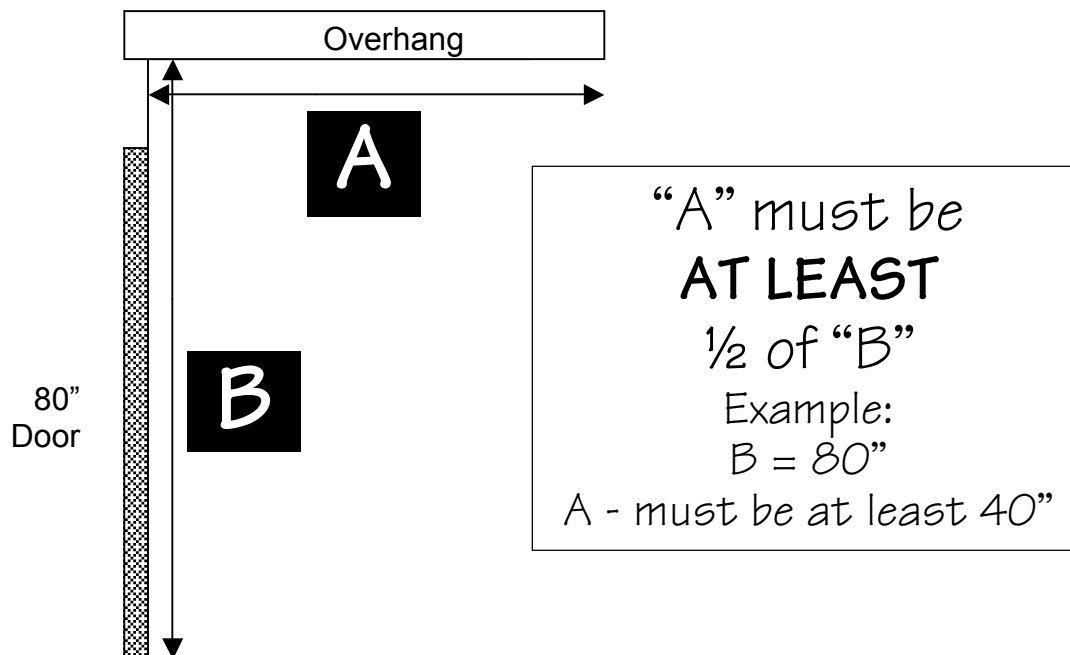

All doors must be sealed on all six sides within ten days of receipt with all hardware removed prior to sealing. AutumnWOOD solid wood doors cannot be painted.

Light colored finishes must be used where the exposure to direct sunlight is a possibility. Light finishes reflect light and deter heat absorption into the wood. Dark finishes allow heat absorption into the wood, thus accelerating the breakdown of the finish and the possibility of damage to the product.

Storm Doors must be vented and will cause extreme temperature buildup that can accelerate the breakdown of the finish and the possibility of damage to the product.